

MARSSTONE



MARSSTONE


The design inspiration draws from the native igneous rocks on Mars' surface.

Eroded by aeolian winds over hundreds of millions of years, scarred by celestial impacts and deposited with volcanic minerals, Mars bears its distinctive mottled texture and muted red-brown-grey tones. Stripped of ornate embellishments, the tile encapsulates naturally flowing stone veins, fine granular textures and gradient mineral layers of the planetary rock. Modern ceramic craftsmanship recreates the primitive charm of extraterrestrial stone.

Infuse the tranquil power of cosmic wilderness into interior spaces. Blending the avant-garde spirit of interstellar exploration with the mild solidity of natural stone, it lays a restrained, sophisticated minimalist foundation steeped in unique narrative charm.



MOODBOARD INSPIRATION

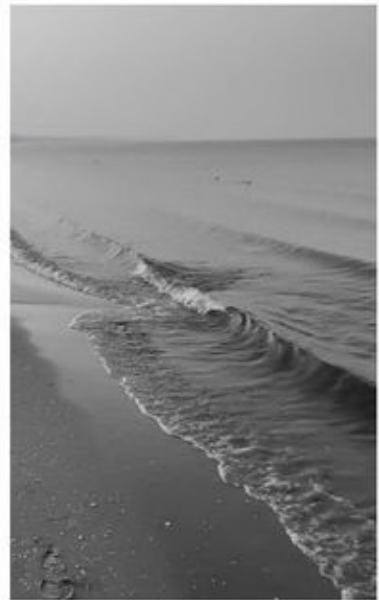

MARSSTONE



White



Ivory



Pearl



Cream



Clay



Smoke



Floor/Wall :
OSM601ST612 600x1200mm



Floor/Wall :
OSM602ST612 600x1200mm





Floor: OSM601ST6620 600x600mm



Wall/Floor:
OSM602ST66 600x600mm



Wall/Floor:
OSM604ST612 600x1200mm



Floor: OSM603ST6620 600x600mm



Floor: OSM603ST612 600x1200mm




OSM606ST612 600x1200mm



Wall/Floor:
OSM606ST612 600x1200mm



Floor: OSM605ST6620 600x600mm

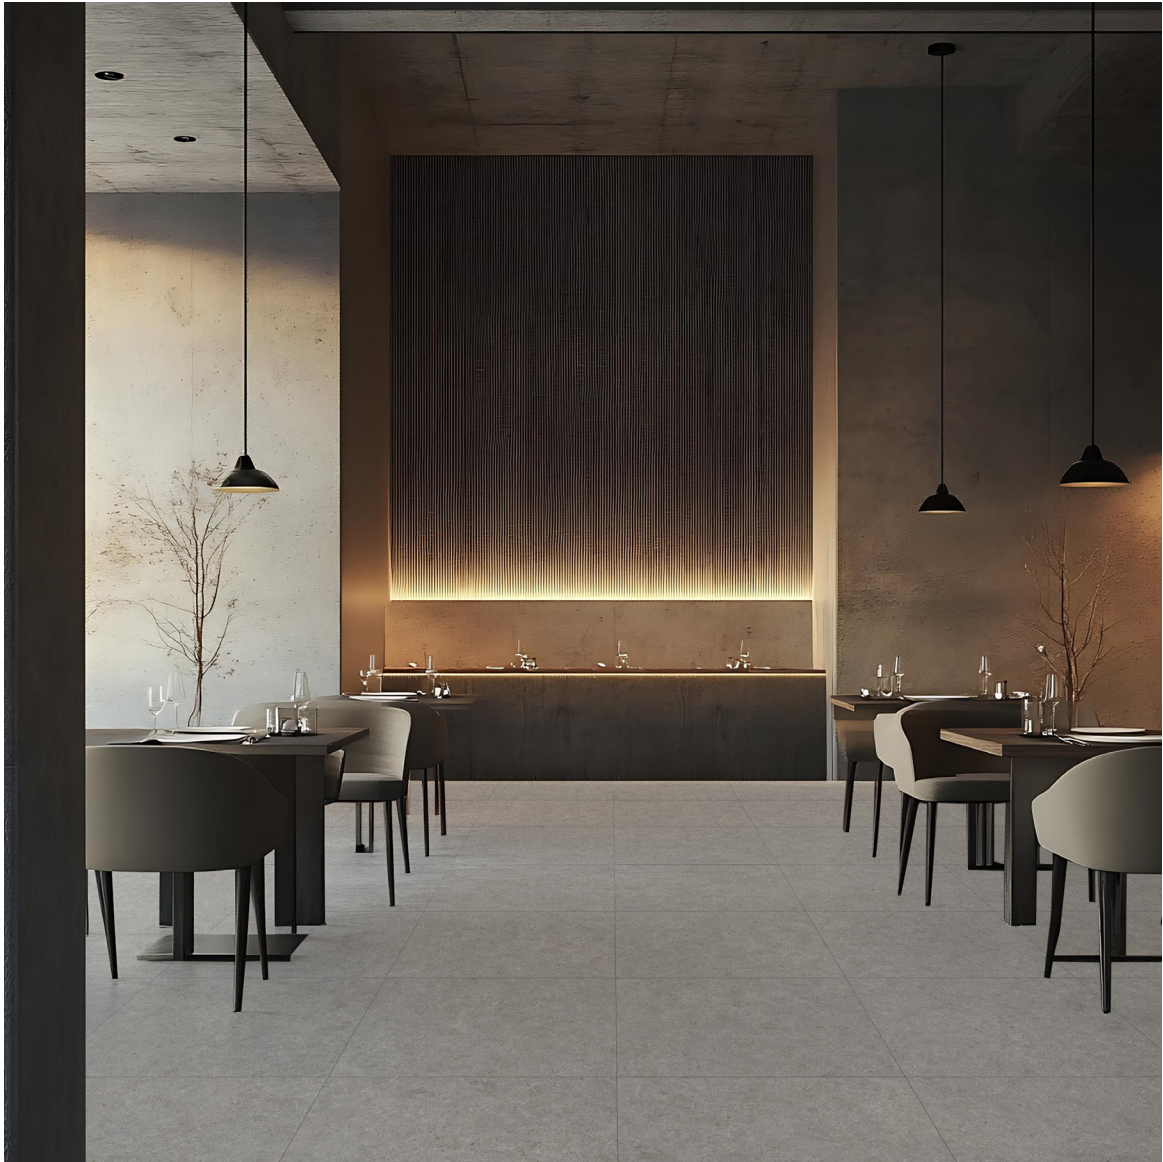


Floor: OSM605ST66 600x600mm

The image displays three distinct horizontal bands of textured paper. The top band is a light, off-white color with a fine, speckled texture. The middle band is a warm, cream-colored or ivory shade, also featuring a similar speckled texture. The bottom band is a soft, light gray or pearl color, maintaining the same textured appearance. The transitions between the bands are smooth and horizontal.

WHITE

IVORY

PEARL

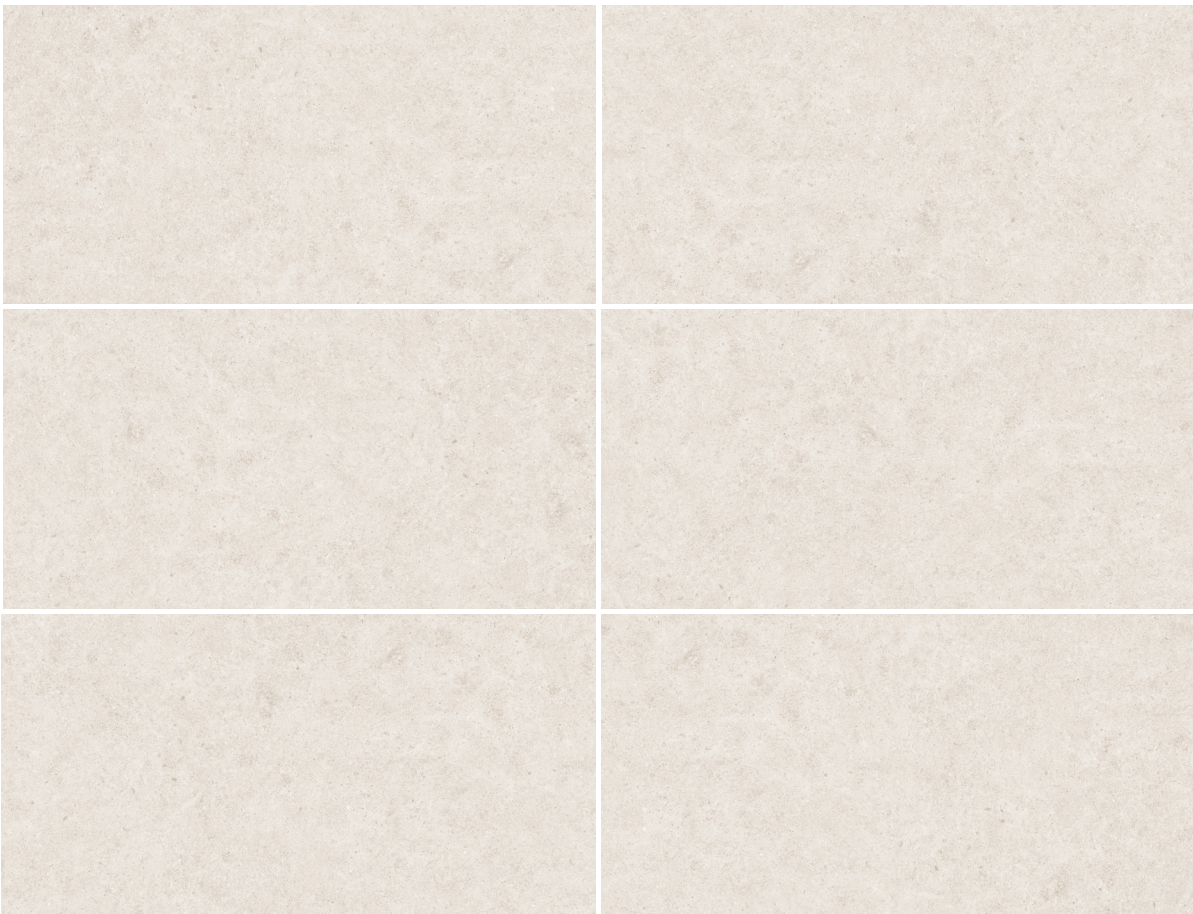


9.5mm



3D Mold |R10
600x1200mm 24"x48"
CREAM
IVORY
PEARL
CREAM
SMOKE
CLAY
6 Patterns

9.5mm



3D Mold |R10
600x600mm 24"x24"
CREAM
IVORY
PEARL
CREAM
SMOKE
CLAY
12 Patterns

20mm



3D Mold |R10
600x600mm 24"x24"
WHITE
PEARL
SMOKE
12 Patterns



3d Mould
Matt tech



Shade Variation

V2


The image displays a vertical strip of three different textured paper samples. The top sample is a light cream color with a fine, speckled texture. The middle sample is a medium brown color with a slightly more pronounced, fibrous texture. The bottom sample is a dark gray color with a coarse, granular texture. Each sample is labeled with its name in a simple, sans-serif font in the bottom-left corner of its respective section.

CREAM


CLAY

SMOKE


DECORS&ACCESSORIES




265*305 10.4" x12"




265*305 10.4" x12"




300*300 12" x12"



350*430 13.7" x16.9"



300*300 12" x12"



300*300 12" x12"



270*73 10.5" x2.8"



3D Mold | R10



3d Mould
Matt tech



Shade Variation

V2

PLAIN TILES

600x1200mm/24"x48"			600x600mm/24"x24"		
SIZE		THICKNESS	THICKNESS		FINISH
		9.5mm	9.5mm	20mm	
	WHITE	OSM601ST612	OSM601ST66	OSM601ST6620	3D Mold R10
	IVORY	OSM602ST612	OSM602ST66		
	PEARL	OSM603ST612	OSM603ST66	OSM603ST6620	
	CREAM	OSM604ST612	OSM606ST66		
	CLAY	OSM606ST612	OSM604ST66		
	SMOKE	OSM605ST612	OSM605ST66	OSM605ST6620	

PACKING INFORMATION

Size(mm)	Piece/Box	Sqm/Piece	Sqm/Box	Box/Pallet	Sqm/Pallet	Weight/Box	Weight/Pallet
600*1200*9.5	2	0.72	1.44	60	86.4	32.5	1950
600*600*9.5	4	0.36	1.44	60	86.4	32.5	1950
600*600*20	2	0.36	0.72	40	57.6	32.5	1300

Colour Variations:Since the colour reproduction in this printed piece will vary from the actual tile colours,final selection should be made from tile samples.
Colour,shade and glaze variations may exist due to the inherent characteristics of porcelain tile.

INSTALLATION

1. AFTER RECEIVING THE MATERIAL, PLEASE CAREFULLY INSPECT ITS QUALITY CHARACTERISTICS (SIZE, COLOR, GRADE COMPLIANCE) BEFORE LAYING, IF DEFECTS ARE FOUND DURING THE LAYING CONSTRUCTION, NO CLAIMS WILL BE ACCEPTED FOR THE MATERIALS ALREADY LAID.
2. TO ACHIEVE THE BEST VISUAL EFFECT, IT IS RECOMMENDED TO CAREFULLY MATCH PRODUCTS WITH DIFFERENT TEXTURE SURFACES DURING PLACEMENT TO AVOID DUPLICATE TEXTURE PATTERNS AND FULLY SHOWCASE THE COLOR EFFECT OF THE PRODUCT.
3. THE LAYING CONSTRUCTION CAN BE CARRIED OUT USING ADHESIVES USING SPECIAL HIGH-PERFORMANCE ADHESIVES FOR CERAMICS, C2 OR HIGHER CATEGORY ADHESIVES. IT IS RECOMMENDED TO APPLY TWO LAYERS OF ADHESIVE TO PREVENT THE MATERIAL FROM FALLING OFF AND CRACKING AFTER INSTALLATION.
4. DURING LAYING CONSTRUCTION, THE BASE MUST BE STABLE, DRY, FREE FROM FROST, AND MUST NOT OVERHEAT. IN ANY CASE, IT IS NECESSARY TO FOLLOW THE INSTRUCTIONS OF THE SUBSTRATE MATERIAL USED AND THE SPECIFIC ADHESIVE MANUFACTURER.
5. CEMENT ADHESIVE MUST BE APPLIED AT ROOM TEMPERATURE, USUALLY BETWEEN +5°C AND +30/35° C.
6. FOR LAYING CONSTRUCTION, IT IS RECOMMENDED TO FOLLOW THE TECHNICAL TIME SPECIFIED BY THE MANUFACTURER OF THE ADHESIVE USED.
7. AVOID USING PENCILS (GRAPHITE) OR NON WASHABLE MARKING PENS TO MARK SURFACES, ESPECIALLY POLISHED PRODUCTS.

CLEANING AFTER INSTALLATION

1. AT THE END OF ON-SITE CONSTRUCTION, "POST CONSTRUCTION" CLEANING MUST BE CARRIED OUT.
2. IF THE RESIDUE OF THE SEALANT IS NOT FULLY REMOVED, IT WILL ABSORB VARIOUS TYPES OF DIRT AND LEAVE TRACES THAT ARE DIFFICULT TO REMOVE.
3. BUFFER ACID DILUTED IN WATER MUST BE USED TO COMPLETELY DISSOLVE AND REMOVE THESE RESIDUES IN A SHORT PERIOD OF TIME, AND WASHED WITH A LARGE AMOUNT OF WATER TO AVOID ACIDIC SUBSTANCES FROM CORRODING THE SURFACE OF TILES, IF ACIDIC SUBSTANCES ARE NOT REMOVED IN A SHORT PERIOD OF TIME, IT MAY CAUSE PERMANENT SURFACE DAMAGE.
4. WHEN CLEANING, IT IS BEST TO CONDUCT A CLEANING TEST ON A SMALL AREA OF THE CERAMIC TILE SURFACE. IF THE EFFECT IS GOOD, THE ENTIRE SURFACE CAN BE CLEANED IN THIS WAY.
5. AFTER CLEANING THE RESIDUE, A DEGREASING CLEANER MUST BE USED FOR ALKALINE WASHING TO HELP REMOVE DIRT.
6. POLISHING PRODUCTS REQUIRE THE USE OF NON ABRASIVE EQUIPMENT DURING THE CLEANING PHASE TO AVOID SCRATCHING OR DARKENING THE SURFACE.

TECHNICAL FEATURES

STANDARD

VALUE

	Water absorption	UNI EN ISO 10545/3 ASTM C373	Conforme Compliant
	Modulus of rupture	UNI EN ISO 10545/4	≥ 35 N/mm ²
	Breaking strength	UNI EN ISO 10545/4 ASTM C648	≥ 1300 N ≥ 400 lbf
	Frost resistance	UNI EN ISO 10545/12 ASTM C1026	Conforme Unaffected
	Chemical resistance to high and low acid and basic concentrations	UNI EN ISO 10545/13 ASTM C-650	A - LA - HA Unaffected
	Stain resistance	UNI EN ISO 10545/14 ASTM C1378	4 Class A

